

A (x1)




B (x2)



C (x1)



D (x1)



E (x4)
ST6.3x55




F (x2)
ST4.2x32




G (x4)
Ø10x45




H (x2)
Ø7x35








1

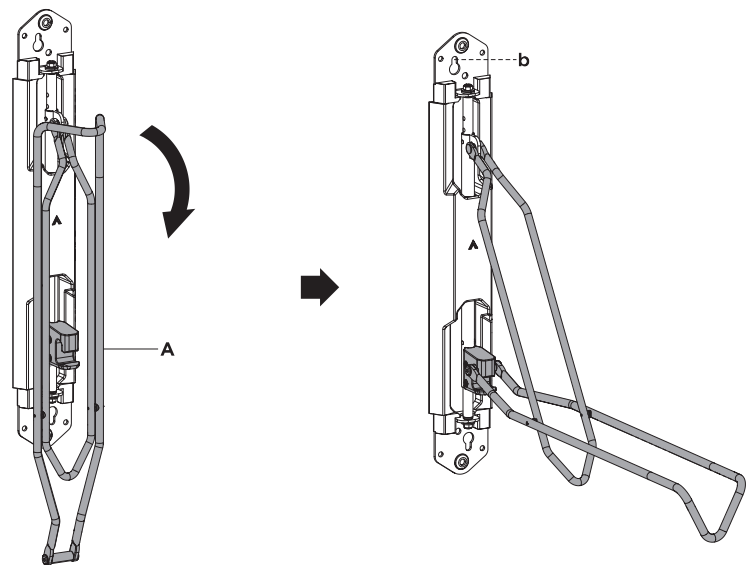

2

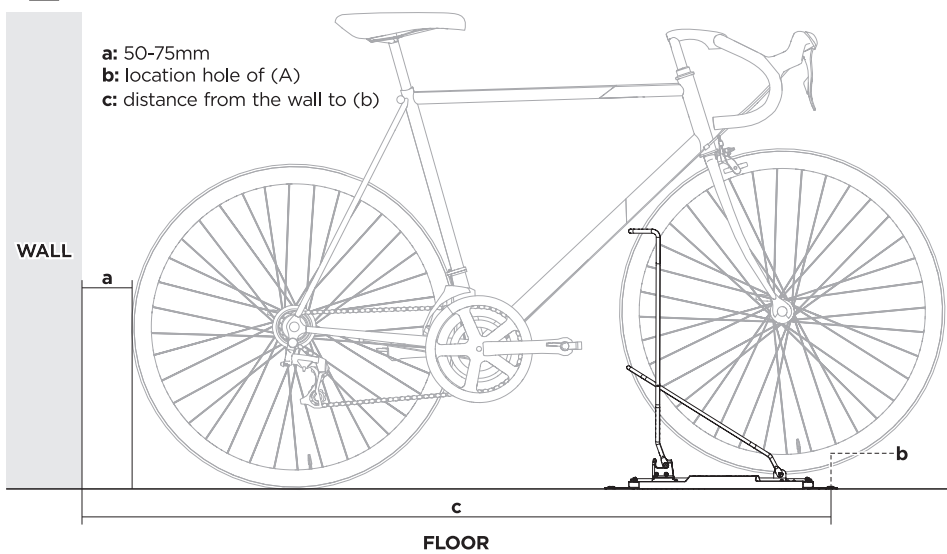


3

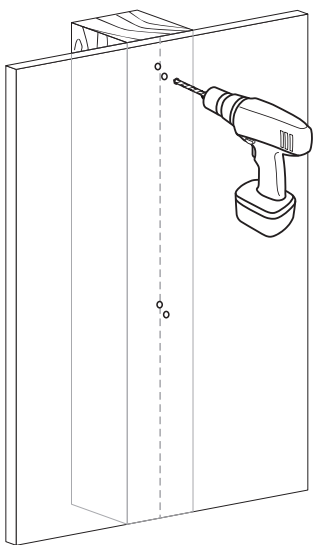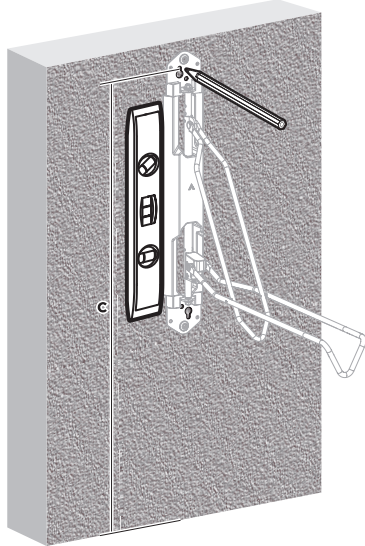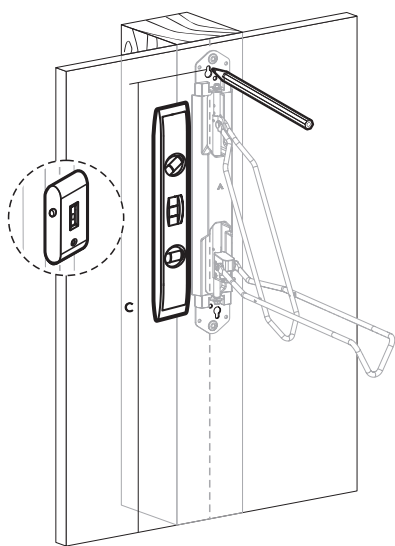





55mm
(2.2")

Ø 4.5mm
(Ø 3/16")

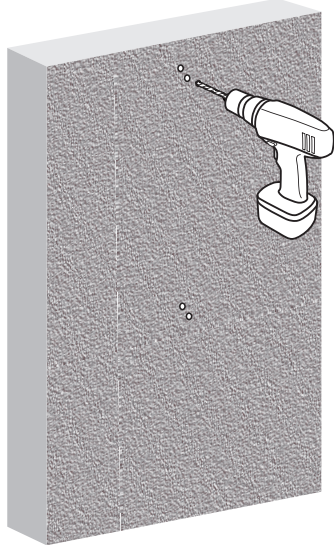



60mm
(2.4")

Ø 10mm
(Ø 3/8")

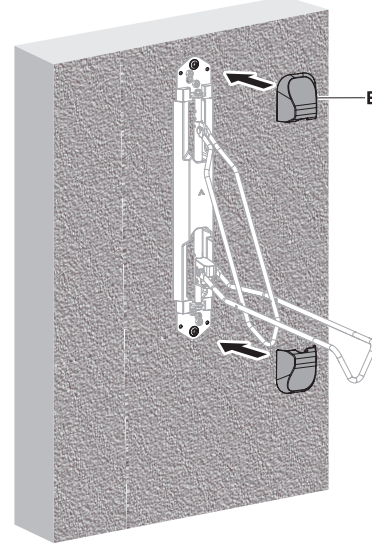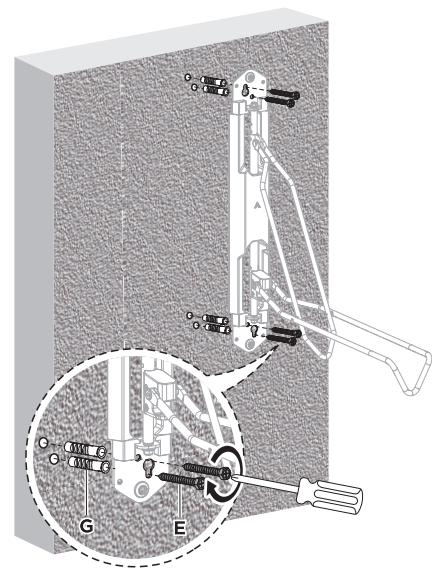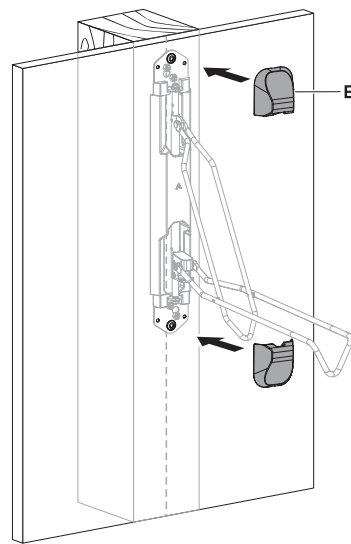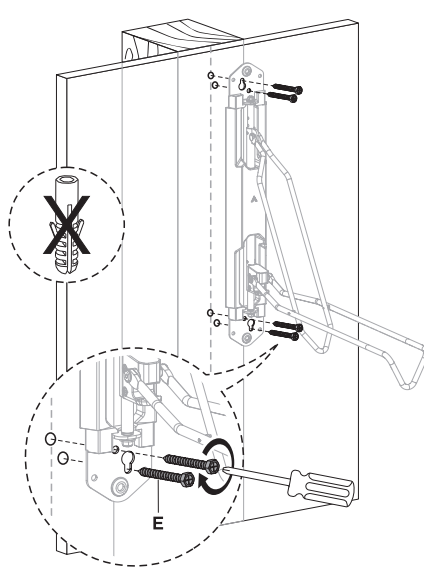

4a

Adjust the height of upper arm to fit different bike sizes and test if it is easy to use.

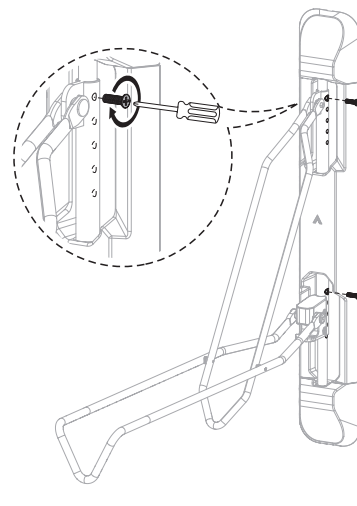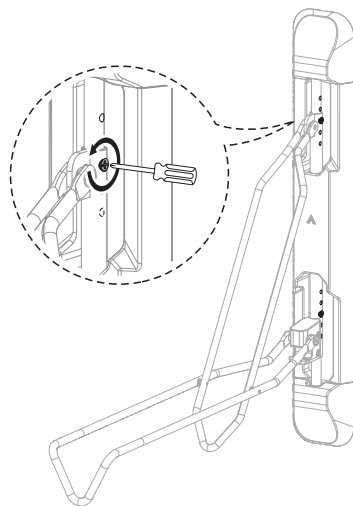

Note: Before assembling the rear-wheel baffle, hang the bicycle on the front-wheel rack, and verify suitable location of the rear baffle. After then take down the bicycle, drill holes and assemble.

