Product data sheet

HOFMANN MEGAPLAN Tire changer "megamount 20 MOTO"



Article number:	89668553
Original number:	MSMBIKE00018
:	
EVP:	**3600.95 €**

Technical data


Design	assembly machine
Width	105.0 cm
Width	1050.0 mm
Features	assembly / disassembly
Range of application	motorcycle, Scooter
Main colour	black
Secondary colour	grey
Rim width up to	14 "
Rim diameter up to	40 "
Rim diameter from	5 "
Height	1875.0 mm
Height	187.5 cm
Air requirement	8 bar
Length	1100.0 mm
Length	110.0 cm
Material	steel
Material 2	aluminium
Max. wheel diameter	39.5 "
Voltage	400 V

Description

HOFMANN MEGAPLAN Tire Changer "megamount 20 MOTO"
Motorcycle, clamping range 5" – 25", pneumatic bead breaker, 400 V
Semi-automatic tire changer for motorcycle wheels. It features a side-swiveling mounting arm with manual locking of the mounting head, as well as manual side adjustment for quick adaptation to different wheel sizes. The pneumatic tire beader with a horizontal bead-stripping system ensures consistent control and high ease of use throughout the entire work process. The self-centering clamping plate ensures consistent clamping force regardless of the rim diameter, while the ergonomically positioned pedals allow for simple and efficient operation. The machine was designed for reliability and ease of use and is the ideal solution for professional motorcycle tire service.

Technical Specifications:
Clamping range: 5" – 25"
Maximum wheel diameter: 1000 mm (39.5")
Maximum wheel width: 370 mm (14.5")
Ejection force: 1100 kg
Rotational speed: 8 rpm
Three-phase motor: 0.55 kW
Operating pressure: 8–10 bar (116–145 psi)
Average noise level: < 70 ± 3 dB(A)
Net weight: 190 kg, **plus freight and handling charges**



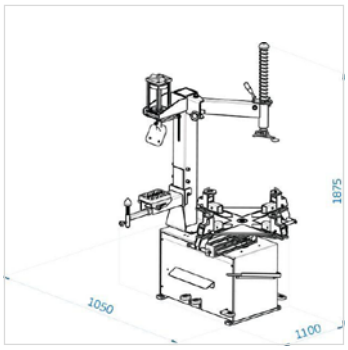



This product data sheet is based on the information available at the time of generation. Subsequent changes to prices, technical specifications, or product information are possible. The current details provided with the item are authoritative.

Date of generation: 30.10.2026